

# Republic of the Philippines SOUTHERN LUZON STATE UNIVERSITY Lucban, Quezon

#### REQUEST FOR QUOTATION

#### LABORATORY SUPPLIES AND EQUIPMENT FOR ELECTRONICS ENGINEERING (CEN)

Purchase Request No. <u>2024-01-0431</u>
Approved Budget for the Contract: ₽ 75,000.00

The Southern Luzon State University through the Bids and Awards Committee invites interested firms/supplier to submit quotation for the procurement of <u>Laboratory Supplies and Equipment for Electronics Engineering (CEN)</u> to apply the sum of <u>Seventy-Five Thousand Pesos Only</u> (#275,000.00) inclusive of VAT, being the <u>Approved Budget for the Contract (ABC)</u>, details as follows:

Qty.	Unit	ITEM/S DESCRIPTION	
2	unit	Variable DC Power Supply, 2-Channel, 30V/5A/150W	
1	unit	AC Power Supply	

1. The quotation must be submitted (can also be send thru email at the contact details listed below) or to the Office of the Procurement Office/Bids and Awards Committee, Southern Luzon State University, 2<sup>nd</sup> Flr. Hermano Puli Building, and shall be received by the Committee.

E-mail: <u>slsuprocurement2021@gmail.com</u>

2. The SLSU reserves the right to reject any or all quotations and/or proposals and waive any formalities/ informalities therein and to accept such bids it may consider as most advantageous to the agency and to the government. Southern Luzon State University SLSU neither assumes any obligation for whatsoever losses that may be incurred in the preparation of bids, nor does it guarantee that an award will be made.

MARIDEL C. ZABELLA
Head, Procurement Office
Southern Luzon State University
Lucban, Quezon
Tel. No.: (042)540-6519



# Republic of the Philippines SOUTHERN LUZON STATE UNIVERSITY

#### Lucban, Quezon

#### REQUEST FOR QUOTATION

Date:

PR No.:

2024-01-0431

CEN - ELECTRONIC ENGINEERING

Office/End-User:


COMPANY NAME:

ADDRESS :								
TEL. N	O./FAX N	0. :		TIN No.:				
4. Price validity shall be for a period of sixty (60) calendar days.					uotation duly signed by your representative not  IDEL C. ZABELLA  Procurement Office			
Item #	Qty.	Unit	ITEM/S DESCRIPTION	Unit Price	Total Cost			
	2	unit	Variable DC Power Supply, 2-Channel, 30V/5A/150W  * 2 adjustable main channels 030 V/O5 ADC/150 W and 1 fixed channel 5 v, ADC.  *Output on/off switchable.  *Separate LED displays for voltage and current  *Short circuit and overload protection.  *Excellent stability and ripple factor.  *4mm ssafety jacks.  *Safety: EN 61010-1.  *Output voltage channel 1 and 2 : 030VDC  *Output current channel 1 and 2 : 05ADC  *Ripple and noise channel 1 and 2 : ≤0.5 mVRMS (I≤3 A); ≤mVRMS (I≥3 A); ≤3 mARMS  Output voltage/current channel 3 : Fixed output, 5 V/3 ADC  Ripple and noise channel 3/fixed output : 10mV  *Display : Quad LED Display, voltage: ±0.2% + 2 digits, current ±1% + 2 digits  Dimension (mm) : 265 x 170 x 355; 11kg1 kg					
	1	unit	AC Power Supply Voltage Range : 30V =OV -30V, 5Amp with output overload protection					
				-				
Source of Fund:  Delivery Period:  After having carefully need & accepted your Genaral Conditions, We quote you on the item(s) at prices note above. If the space of providec on the Delivery Period, Warranty & Price Validity are left blank, it means that I concur w/ the Terms & Conditions specified by SLSU Procurement Office.								
AFA-PRC	Printed Name/Signature/Date							
AFA-PRC-1.02 F2, REV. 4								



### Variable DC Power Supply, 2-Channel, 30V/5A/150W

- 2 adjustable main channels 0...30 V/0...5 ADC/ 150 W and 1 fixed channel 5 V/3 ADC.
- · Output on/off switchable.
- Separate LED displays for voltage and current.
- · Short circuit and overload protection.
- Excellent stability and ripple factor.
- 4 mm safety jacks.
- Safety: EN 61010-1.
- Output voltage channel 1 and 2: 0...30 VDC
- Output current channel 1 and 2: 0...5 ADC
- Output power channel 1 and 2: 150W each
- Ripple and noise channel 1 and 2 : ≤0.5 mV<sub>RMS</sub> (I≤3 A); ≤1 mV<sub>RMS</sub> (I≥3 A); <3 mA<sub>RMS</sub>
- Output voltage/current channel 3 : Fixed output, 5 V/3 ADC
- Ripple and noise channel 3/fixed output: 10 mV
- Display: Quad LED display, voltage: ±0.2% + 2 digits, current ±1% + 2 digits
- Dimensions (mm): 265 x 170 x 355; 11 kg

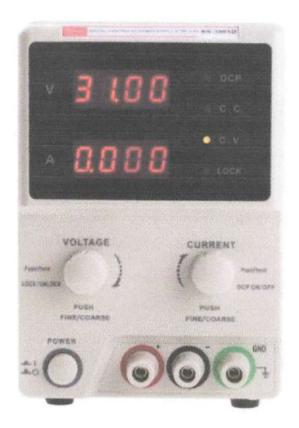



## **AC Power Supply**

Voltage Range: 30V=0V-30V, 5Amp with output overload protection