



Republic of the Philippines  
**SOUTHERN LUZON STATE UNIVERSITY**  
Lucban, Quezon



## REQUEST FOR QUOTATION

### **INSTALLATION OF GLASS AND ALUMINUM DOOR AT IGS BUILDING 2<sup>ND</sup> FLOOR (IAELO)**

**Purchase Request No. 2025-07-2014**

**Approved Budget for the Contract: ₱ 72,800.00**


The Southern Luzon State University through the Bids and Awards Committee invites interested firms/supplier to submit quotation for the procurement of **Installation of Glass and Aluminum Door at IGS Building 2<sup>nd</sup> Floor (IAELO)** to apply the sum of **Seventy Two Thousand and Eight Hundred Pesos Only (₱72,800.00)** inclusive of VAT, being the **Approved Budget for the Contract (ABC)**, details as follows:

Qty.	Unit	ITEM/S DESCRIPTION
1	set	(Door 1) 2.10 x 1.00m Powder Coated Aluminum Frame Heavy Duty Swing Door, 6.0mm thk with Frosted Sticker and Complete Accessories 2" x 4" PCAF White Aluminum Door Jamb
1	set	(Door 2) 2.10 x 1.00m Powder Coated Aluminum Frame Heavy Duty Swing Door, 6.0mm thk with Frosted Sticker and Complete Accessories 2" x 4" PCAF White Aluminum Door Jamb
2	set	(Door 3) 2.10 x 0.70m Aluminum door 700 series (White) w/ pneumatic door closer and complete accessories
1	set	(Door 4) 2.10 x 2.00m Supply and Installation of frosted sticker (Director's Office)
1	set	(Door 5) 2.10 x 2.00m Supply and Installation of frosted sticker (Faculty Office)
18	pcs	WPC Indoor Fluted Panels: 20mm x 160mm x 2900mm
1	lot	Consumables (no more nails, drill bit, etc.)

1. The quotation-n must be submitted (can also be send thru email at the contact details listed below) or to the Office of the Procurement Office/Bids and Awards Committee, Southern Luzon State University, 2<sup>nd</sup> Flr. Hermano Puli Building, and shall be received by the Committee.

E-mail : [slsuprourement@slsu.edu.ph](mailto:slsuprourement@slsu.edu.ph)

2. The SLSU reserves the right to reject any or all quotations and/or proposals and waive any formalities/ informalities therein and to accept such bids it may consider as most advantageous to the agency and to the government. Southern Luzon State University SLSU neither assumes any obligation for whatsoever losses that may be incurred in the preparation of bids, nor does it guarantee that an award will be made.

  
**MARIDEL C. ZABELLA**  
Director, Procurement Office  
Southern Luzon State University  
Lucban, Quezon  
Tel. No.: (042)540-6519





Republic of the Philippines  
SOUTHERN LUZON STATE UNIVERSITY  
Project Management Office  
Lucban , Quezon

**PROJECT TITLE :** Installation of Glass and Aluminum Door at IGS Building (Second Floor)

**PROJECT LOCATION:** SLSU Main Campus, Brgy. Kulapi Lucban, Quezon

**OWNER :** Southern Luzon State University

**MODE OF IMPLEMENTATION :** by Contract

**PROJECT DURATION :** 20 Calendar Days

**BILL OF MATERIALS**


GLASS AND ALUMINUM DOOR						
Quantity	Unit	Description	Direct Cost	Indirect Cost (VAT/OCM/PROFIT) INSTALLATION COST	Unit Cost	Amount
1	set	D 1 2.10 x 1.00m Powder Coated Aluminum Frame Heavy Duty Swing Door, 6.0mm thk with Frosted Sticker and Complete Accessories 2"X4" PCAF White Aluminum Door Jamb				
1	set	D 2 2.10 x 1.00m Powder Coated Aluminum Frame Heavy Duty Swing Door, 6.0mm thk with Frosted Sticker and Complete Accessories 2"X4" PCAF White Aluminum Door Jamb				
2	set	D 3 2.10 x 0.70m Aluminum door 700 series (White) with pneumatic door closer and complete accessories				
1	set	D 4 2.10 x 2.00m Supply and Installation of frosted sticker (Director's Office)				
1	set	D 5 2.10 x 2.00m Supply and Installation of frosted sticker (Faculty Office)				
18	pcs	WPC Indoor Fluted Panels: 20mm x 160mm x 2900mm				
1	lot	Consumables (no more nails, drill bit, ect.)				

**TOTAL**

-

TOTAL PROJECT COST IN WORDS: \_\_\_\_\_

CONTRACTOR/BIDDER: \_\_\_\_\_





Republic of the Philippines  
Southern Luzon State University  
Project Management Office  
Lucban, Quezon


**PROJECT TITLE:** Installation of Glass and Aluminum Door at IGS Building (Second Floor)  
**PROJECT LOCATION:** SLSU Main Campus, Brgy. Kulapi Lucban, Quezon  
**OWNER:** Southern Luzon State University  
**PROJECT DURATION:** 20 Calendar Days  
**SUBJECT:** Specification of materials and finishes

**SPECIFICATION OF MATERIALS, FINISHES AND SCOPE OF WORKS**

**GLASS AND ALUMINUM DOOR**

- Supply and installation of powder coated aluminum frame heavy duty swing door, 6.0mm thk with frosted sticker and complete accessories in 2"x4" PCAF white aluminum door jamb, director's office and conference room.
- Supply and installation of frosted stickers on the existing glass door of faculty office and director's office.
- Supply and installation of aluminum door 700 series (white) with pneumatic door closer and complete accessories.
- Supply and installation of WPC Indoor Fluted Panel: 20mm x 160mm x 2900mm.
- Removal of existing doors.


Prepared by:

  
**ENGR. JOELLE E. MORALES**  
Project Development Officer I

Reviewed by:

  
**ENGR. MARK KEVIN A. MAKIPAGAY**  
Project Development Officer II


Recommending approval: .

  
**ENGR. MELVIN A. MAKIPAGAY**  
Director, Project Management Office


Approved by:

  
**FREDERICK T. VILLA, DT**  
University President




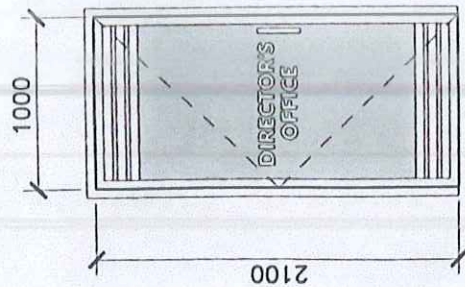


D-1  
2100 X 1000mm ALUMINUM DOOR JAMB  
210 X 1.00mm POWDER COATED ALUMINUM  
FRAME HEAVY DUTY SPRING DOOR, GUM  
FRAME WITH FROSTED STICKERS AND  
THE COMPLETE ACCESSORIES  
1 SET(S)

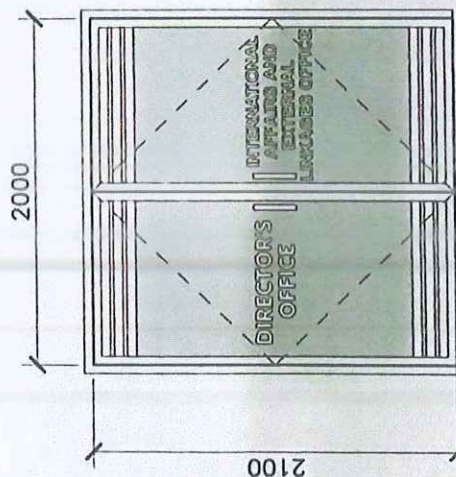


D-4  
NOTE: EXISTING DOOR  
SUPPLY AND INSTALLATION OF FROSTED  
STICKERS  
1 SET(S)

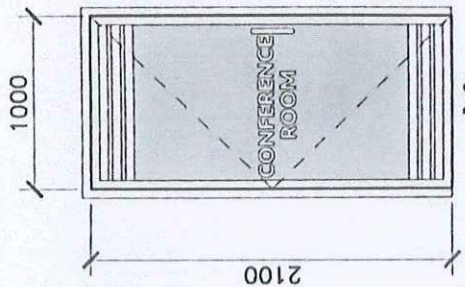


D-2  
2100 X 1000mm ALUMINUM DOOR JAMB  
210 X 1.00mm POWDER COATED ALUMINUM  
FRAME HEAVY DUTY SPRING DOOR, GUM  
FRAME WITH FROSTED STICKERS AND  
THE COMPLETE ACCESSORIES  
1 SET(S)

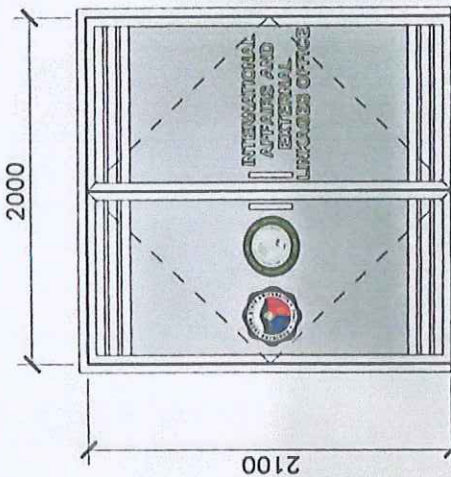

D-5  
NOTE: EXISTING DOOR  
SUPPLY AND INSTALLATION OF FROSTED  
STICKERS  
1 SET(S)

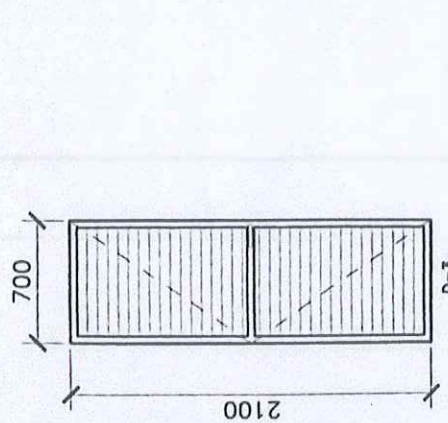

D-3  
210 X 0.75m ALUMINUM DOOR 700  
SERIES (PANEL) WITH PNEUMATIC DOOR  
CLOSER AND COMPLETE ACCESSORIES  
1 SET(S)

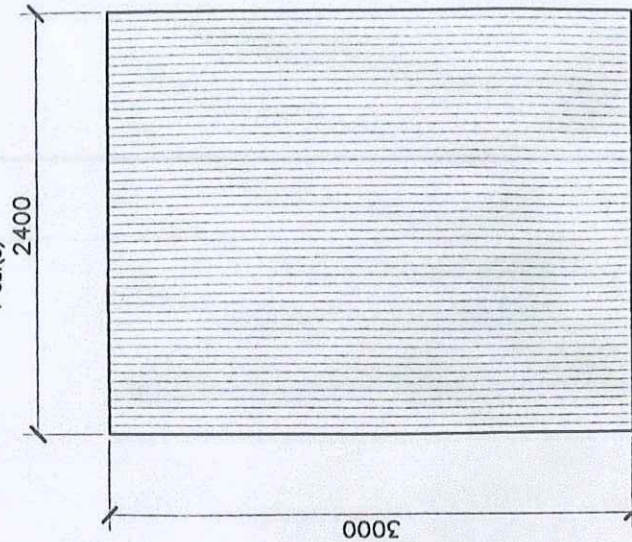

WPC 1800mm FLUTED PANELS 20mm x 180mm x 2000mm  
WPC WALL CLADDING

CIVIL ENGINEER	PROJECT TITLE:	PLANNED BY:	REVIEWED BY:	RECOMMENDING APPROVAL:	APPROVED BY:	SHEET CONTENT:	SHEET #
	INSTALLATION OF GLASS AND ALUMINUM DOOR AT ICS BUILDING (SECOND FLOOR)	ENGR. JOSE C. MORALES PROJECT MANAGER OFFICE 1 10/1/2024	ENGR. MARK L. MARIAGUA PROJECT MANAGER OFFICE 2 10/1/2024	ENGR. WELVIN A. MAKIPAGAY DIRECTOR PROJECT MANAGEMENT OFFICE	FREDERICK T. VILLA, DT UNIVERSITY PROJECT		