



Republic of the Philippines
SOUTHERN LUZON STATE UNIVERSITY
Lucban, Quezon



REQUEST FOR QUOTATION

AIR CONDITION UNIT FOR MATH LABORATORY (CAS)

Purchase Request No. 2025-10-2505

Approved Budget for the Contract: ₱ 99,955.00


The Southern Luzon State University through the Bids and Awards Committee invites interested firms/supplier to submit quotation for the procurement of **Air Condition Unit for Math Laboratory (CAS)** to apply the sum of **Ninety-Nine Thousand and Nine Hundred Fifty-Five Pesos Only (₱ 99,955.00)** inclusive of VAT, being the **Approved Budget for the Contract (ABC)**, details as follows:

Qty.	Unit	ITEM/S DESCRIPTION
1	lot	Air Condition unit (with installation)

1. The quotation-n must be submitted (can also be send thru email at the contact details listed below) or to the Office of the Procurement Office/Bids and Awards Committee, Southern Luzon State University, 2nd Flr. Hermano Puli Building, and shall be received by the Committee.

E-mail : slsuprocurement@slsu.edu.ph

2. The SLSU reserves the right to reject any or all quotations and/or proposals and waive any formalities/ informalities therein and to accept such bids it may consider as most advantageous to the agency and to the government. Southern Luzon State University SLSU neither assumes any obligation for whatsoever losses that may be incurred in the preparation of bids, nor does it guarantee that an award will be made.


MARIDEL C. ZABELLA
Director, Procurement Office
Southern Luzon State University
Lucban, Quezon
Tel. No.: (042)540-6519

REPUBLIC OF THE PHILIPPINES
SOUTHERN LUZON STATE UNIVERSITY
GENERAL SERVICES OFFICE

PROJECT TITLE:	ACU For CAS Math Laboratory
PROJECT LOCATION:	SLSU Lucban Campus
OWNER:	SLSU
MODE OF IMPLEMENTATION:	by contract
DURATION:	30 CD <i>mw</i>

SUMMARY						
ITEM	DESCRIPTION	TOTAL MATERIALS DIRECT COST	LABOR & EQUIPMENT COST	MATERIALS UNIT COST		TOTAL
1	ACU					
		TOTAL ESTIMATED PROJECT COST				

REPUBLIC OF THE PHILIPPINES
SOUTHERN LUZON STATE UNIVERSITY
GENERAL SERVICES OFFICE

PROJECT TITLE:	ACU For CAS Math Laboratory
PROJECT LOCATION:	SLSU Lucban Campus
OWNER:	SLSU
MODE OF IMPLEMENTATION:	by contract
DURATION:	30 CD w/ly

BILL OF MATERIALS

ITEM	DESCRIPTION	Qty	Unit	Materials Direct Cost	Total Materials Direct Cost	Labor & Equipment Cost	TOTAL UNIT COST
I. ACU							
1	2.5 HP Split-type Wall Mounted ACU, Inverter, R-32A, w/installation	1					
2	Safety Breaker w/ Housing 2P-30amp	1					
3	THHN Electrical Wire 5.5 mm ²	60					
4	1/2" Ø Orange PVC Pipe x 3m.	9					
5	Metal Clamp	20					
SUB-TOTAL				-	-	-	-

Republic of the Philippines
Southern Luzon State University
GENERAL SERVICES OFFICE
Lucban, Quezon

PROJECT TITLE: ACU for CAS Math Laboratory
PROJECT LOCATION: SLSU Main Campus
OWNER: Southern Luzon State University
SUBJECT: Scope of works/General Works

SCOPE OF WORKS

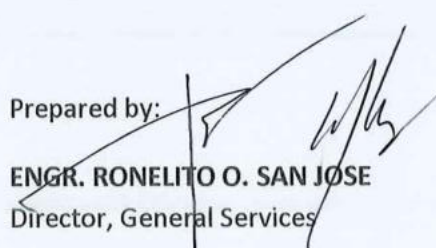
I. Supply and Installation

- a. The contractor shall demolish, supply, deliver, install, test and set to work the ACUs in the location indicated in the purchase order.


GENERAL WORKS

1. The contractor shall furnish all the materials, equipments, tools, apparatus, appliances, accessories, transportation, labor and supervision required for the completion of the project.
2. All contractors submitting proposal for this project shall first examine the site.
3. All works must execute strictly in accordance with current practices.
4. The contractor shall provide the bracket needed for the outdoor unit of the ACU.
5. The contractor shall cut necessary wall and floor openings for pipe/duct penetrations and embedments.
6. The Contractor shall be responsible for verifying location, position and sizing of power supply and connections.
7. The contractor shall demolish existing ductworks, pipe works, conduits, cables and other accessories not necessary for the rehabilitation works.


Prepared by:


ENGR. RONELITO O. SAN JOSE
Director, General Services

Recommending approval by:


DR. ARVIN N. NATIVIDAD
VP-Administrative and Financial Affairs

Approved by:


DR. FREDERICK T. VILLA
University President



Southern Luzon State University
General Services Office

CERTIFICATION

This is to certify that the procurement of 2 sets split-type Air Conditioning Unit (ACU) with the cooling capacity of 5,370 kJ/hr and 1.5 Hp respectively, requested by Shiela M. Manzanilla, Phd. to be installed as new unit in CAS Math Laboratory, SLSU Lucban Campus, complied with the basic requirements for installation of ACUs, such as;

For split type of Unit:

1. Correct capacity of ACU for Cooling load,
2. Available source and correct size of power supply line
3. Strength of wall to hold the indoor unit,
4. Proper spacing between wall and indoor unit,
5. Appropriate installation height from ground,
6. Correct tilt angle of indoor unit,

For Split-type Units:

7. Correct location of outdoor unit,
8. Proper placement of outdoor unit, and
9. Right distance between indoor and outdoor unit.

Note: Need additional extension of 12-gauge wire from the source and 30 Amps, single phase, double-pole circuit breaker for each split-type units.

This certification is issued this 13th day of August 2025 upon the request of the end-user as a requirement for procurement of the said equipment.

Certified by:

ENGR. RONELITO O. SAN JOSE
Director, General Services