



Republic of the Philippines
SOUTHERN LUZON STATE UNIVERSITY
Lucban, Quezon

REQUEST FOR QUOTATION

LABORATORY EQUIPMENT FOR ECE (CEN)

Purchase Request No. 2024-08-1715
Approved Budget for the Contract: ₱75,000.00

The Southern Luzon State University through the Bids and Awards Committee invites interested firms/supplier to submit quotation for the procurement of **Laboratory Equipment for ECE (CEN)** to apply the sum of **Seventy Five Thousand Pesos Only (₱ 75,000.00)** inclusive of VAT, being the **Approved Budget for the Contract (ABC)**, details as follows:

Qty.	Unit	ITEM/S DESCRIPTION
1	unit	Variable DC Power Supply, 2-channel, 30V/5A/150W
1	unit	AC Power Supply
		*see attached document for specifications

1. The quotation must be submitted (can also be send thru email at the contact details listed below) or to the Office of the Procurement Office/Bids and Awards Committee, Southern Luzon State University, 2nd Flr. Hermano Puli Building, and shall be received by the Committee.

E-mail : slsuprourement@slsu.edu.ph


2. The SLSU reserves the right to reject any or all quotations and/or proposals and waive any formalities/ informalities therein and to accept such bids it may consider as most advantageous to the agency and to the government. Southern Luzon State University SLSU neither assumes any obligation for whatsoever losses that may be incurred in the preparation of bids, nor does it guarantee that an award will be made.


MARIDEL C. ZABELLA
Head, Procurement Office
Southern Luzon State University
Lucban, Quezon
Tel. No.: (042)540-6519



Variable DC Power Supply, 2-Channel, 30V/5A/150W

- 2 adjustable main channels 0...30 V/0...5 ADC/ 150 W and 1 fixed channel 5 V/3 ADC.
- Output on/off switchable.
- Separate LED displays for voltage and current.
- Short circuit and overload protection.
- Excellent stability and ripple factor.
- 4 mm safety jacks.
- Safety: EN 61010-1.
- Output voltage channel 1 and 2 : 0...30 VDC
- Output current channel 1 and 2 : 0...5 ADC
- Output power channel 1 and 2 : 150W each
- Ripple and noise channel 1 and 2 : $\leq 0.5 \text{ mV}_{\text{RMS}}$ ($I \leq 3 \text{ A}$); $\leq 1 \text{ mV}_{\text{RMS}}$ ($I \geq 3 \text{ A}$); $< 3 \text{ mA}_{\text{RMS}}$
- Output voltage/current channel 3 : Fixed output, 5 V/3 ADC
- Ripple and noise channel 3/fixed output : 10 mV
- Display : Quad LED display, voltage: $\pm 0.2\%$ + 2 digits, current $\pm 1\%$ + 2 digits
- Dimensions (mm) : 265 x 170 x 355; 11 kg

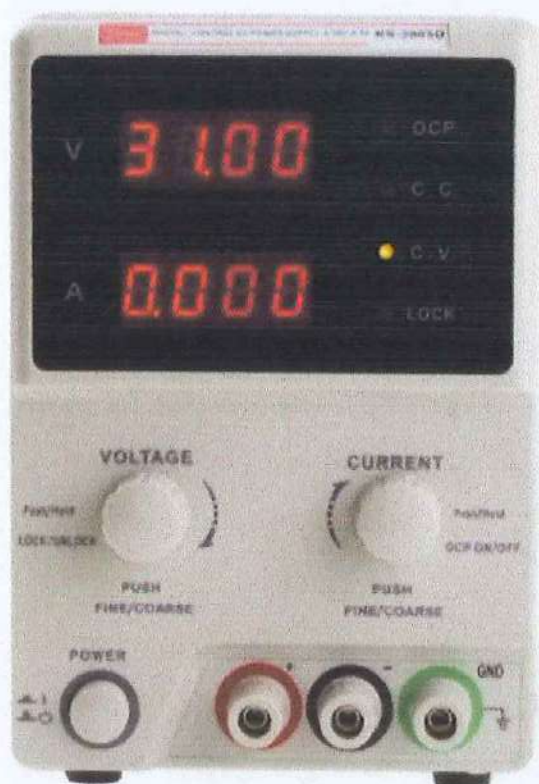

AC Power Supply

Voltage Range: 30V=0V-30V, 5Amp
with output overload protection